



Cube Bollard Quartz PURE LED

Cat. No. CBOLQZ



PURE LED
Pure Performance

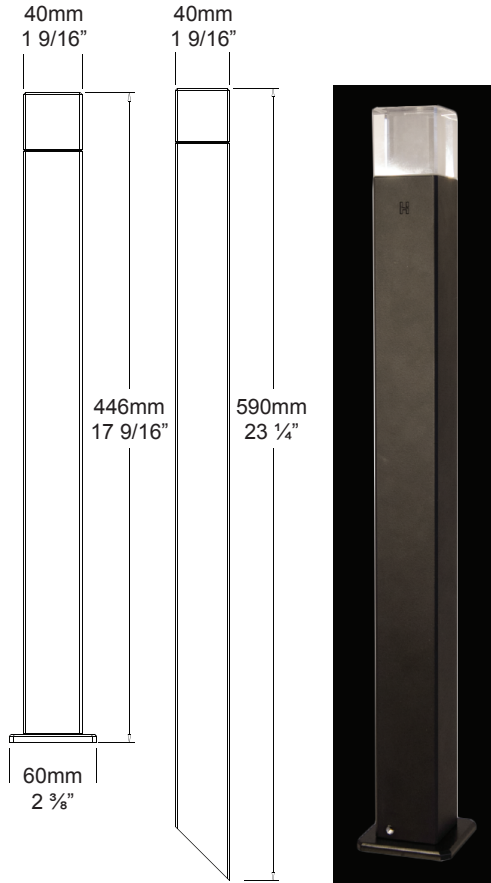


The Cube Bollard Quartz is ideal for illuminating walkways and pathways. With its bold and striking features, this bollard will greatly enhance your outdoor space with a distinctive modern flair.

The Cube Bollard Quartz is constructed from solid Aluminium with a layer of polyester UV stable powder coat, or from solid 316 Stainless Steel with an electropolished finish.

The Hunza PURE LED system uses Cree XTE chips for maximum performance and long life. Power supply options include a choice of 12 volt driver or an external remote driver (series connection). The PURE LED system incorporates HUNZA's Plug-and-Play system for easy replacement of either the LED engine or 12 volt driver in the field. Four beam angles and a choice of 3000K, 4000K, 5000K and Blue colour temperatures are available.

Ordering Information

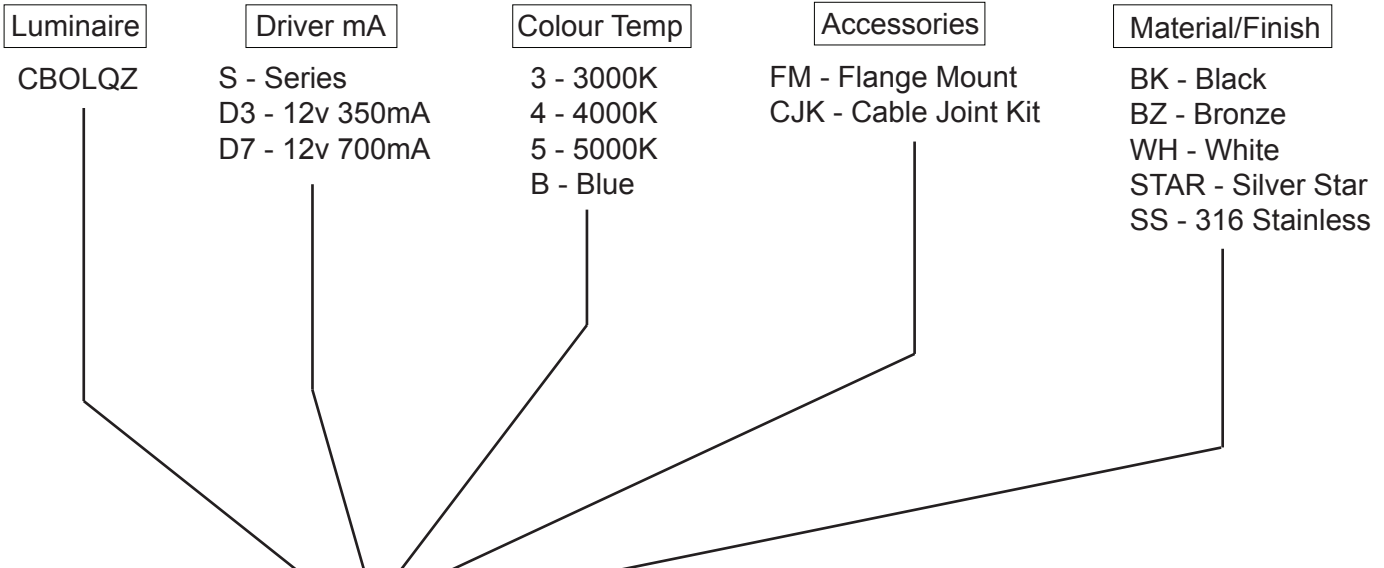

Ordering Example: CBOLQZ S 3 FM BK

HUNZATM PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2013 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

Pole: High corrosion resistant 40mm (1 9/16") x 4mm (3/16") aluminium square tube, with chromate substrate and high UV resistant polyester powder coat.

Colours: Black, Bronze, White, Silver Star.

Head: 40mm (1 9/16") x 40mm (1 9/16") acrylic.

Stainless Steel

Pole: 40mm (1 9/16") x 4mm (3/16") 316 Stainless Steel square tube.

Head: 40mm (1 9/16") x 40mm (1 9/16") acrylic.

Mounting

Set in concrete in the ground or specify with flange mount option, which bolts into concrete, tiling or wooden deck.

Features

Lens:

Acrylic lens with lifetime warranty.

Do not clean with petrochemical substances.

Gasket:

Silicone, iron impregnated 220°C (428°F)

LED

Cree XTE Plug and Play, field replaceable LED board.

Lumen Output: up to 200 lm

CRI Warm White (3000k): 85+

Colour Temp: 3,000K, 4,000K, 5000K, and Blue.

Driver

12 volt ac/dc Hunza driver 350mA or 700mA.

Remote Driver (series) Hun1050 1050mA max. dimmable.

Accessories:

Cable Joint Kit (Cat. CJK150)

Flange Mount (Cat. FM)

Standards

IP66
AS/NZS 61046

Power Supply

12 volt ac/dc Hunza driver

Input: 12 vac/vdc 4 watt

Output: 3.0 vF 350mA

3.0 vF 700mA

Remote Hunza 1050mA driver.

Luminaire supplied with:

Cree XTE 1-3 watt Plug and Play replaceable LED board.