


# Cube Wall PURE LED

Cat. No. CWL



PURE LED  
Pure Performance

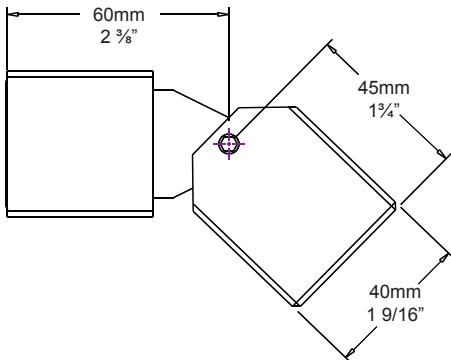

The Cube Lite is designed to be mounted for multiple lighting functions. It can be used as a spot light to provide directional light for landscape features and/or structural elements of a building. This luminaire has a fully adjustable head allowing 360 degree rotation and 0 - 180 degree elevation. The head also can be locked into place transforming it into a wall uplight or down lite.

The Cube Lite is constructed from solid Aluminium finished with a polyester UV stable powder coat, or from solid 316 Stainless Steel with an electropolished finish.

The Hunza PURE LED system uses Cree XTE chips for maximum performance and long life. Power supply is a remote driver (series connection). The PURE LED system incorporates HUNZA's Plug-and-Play system for easy replacement of the LED light engine. Four beam angles and a choice of 3000K, 4000K, 5000K and Blue colour temperatures are available.

## Ordering Information

Luminaire	Driver mA	Beam Angle	Colour Temp	Accessories	Material/Finish
CL	S - Series	15 - 15° TIR Lens 25 - 25° TIR Lens 45 - 45° TIR Lens 60 - 60° TIR Lens	3 - 3000K 4 - 4000K 5 - 5000K B - Blue	WB - Wall Box Adaptor DM - Dual Mount Fixed Plate DMA - Dual Mount Adj. Plate CJK - Cable Joint Kit	BK - Black BZ - Bronze WH - White STAR - Silver Star SS - 316 Stainless

Ordering Example: CWL S 15 3 WB BK

**HUNZA**<sup>TM</sup>  
PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

INTERNATIONAL CONTACTS:  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2013 Hunza Holdings Ltd.

## Luminaire Construction

**CNC machined from one of the following metals:**

### Aluminium

Body: 40mm (1 9/16") x 40mm (1 9/16") solid aluminium  
Head: 40mm solid (1 9/16") x 40mm (1 9/16") solid aluminium.  
High corrosion resistant with chromate substrate and high UV resistant polyester powder coat.  
Colours: Black, Bronze, White, Silver Star.

### Stainless

Body: 40mm (1 9/16") x 40mm (1 9/16") solid 316 stainless steel  
Head: 40mm solid (1 9/16") x 40mm (1 9/16") solid 316 stainless steel.

### Mounting

The luminaire is mounted to the wall using two 5 gauge screws through a mounting disk.

## Features

### Lens:

TIR lens with lifetime warranty.

### Gasket:

Silicone, iron impregnated 220°C (428°F)

### LED

Cree XTE Plug and Play, field replaceable LED board.

**Lumen Output:** up to 200 lm

**CRI Warm White (3000k):** 85+

**Colour Temp:** 3,000K, 4,000K, 5000K, and Blue.

### Driver

Remote Driver (series) Hun1050  
1050mA max. dimmable.

### Accessories:

Cable Joint Kit (Cat. CJK150)  
Wall Box Adaptor (Cat. WB)  
Dual Mount Fixed Plate (Cat. DM)  
Dual Mount Adjustable Plate (Cat. DMA)

## Standards

IP66  
AS/NZS 61046


### Power Supply

Remote Hunza 1050mA driver.


### Luminaire supplied with:

Cree XTE 1-3 watt Plug and Play replaceable LED board.


## Reflector Beam Angles

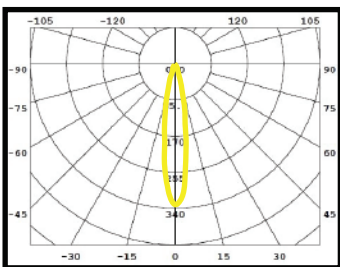


15° TIR Lens

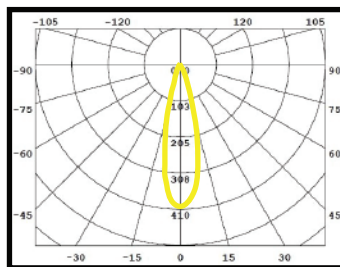

25° TIR Lens

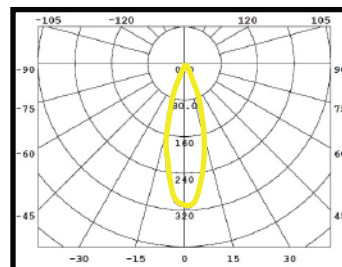

45° TIR Lens

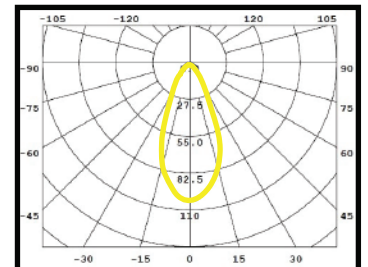

60° TIR Lens

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

INTERNATIONAL CONTACTS:  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2013 Hunza Holdings Ltd.